



QUESTIONS? CONTACT US!

2488 HIGHWAY 33

RUSTON, LA 71270

318-255-1834

INFO@ONTIMEFEEDERS.COM

SHAKEDOWN FEEDER

INSTRUCTIONS

ITEM# 74000

Hardware

2- 3/8" BOLT AND NUT
2- RUBBER WASHERS
2- FENDER WASHERS
1- LID HOOK (See use below)

NYLON RAIN SKIRT
FEET (SET OF 3)
FEET HARDWARE: 3- 3/4 X 5/16 BOLTS,
3- 3/4 WASHERS AND 3- 5/16 LOCK NUTS


HELPFUL TIPS!

**Battery life can be increased by increasing the gap between the feed plate and bottom of hopper.

**Changing feeds may require re-adjustment of feed tray height.

**Extend life of unit by not running while empty to avoid excessive wear and tear on mechanisms.

REFILLING: It is not necessary to unplug the white power wire plug when refilling. Using the supplied hook, place the large portion of the hook through one of the two vent holes on the side of the barrel lid. Hang the small end of the hook on the rim of the barrel. This will hold the lid out of the way while refilling the unit. The hook can also be stowed on the side of the hopper, hung between the hanger bracket and barrel. See below images:

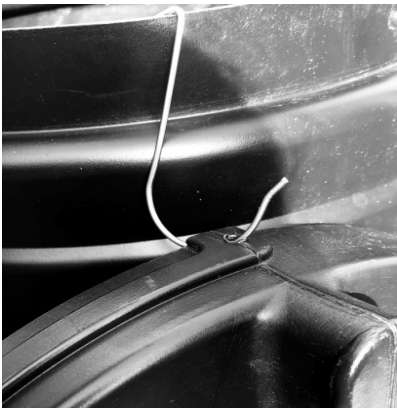

Large end of hook through lid



Hook stowed on side of barrel